

RF POWER AMPLIFIER




2017 Model

R&K-A009K251-5757R



OUTLINE DRAWING

※IN MILLIMETERS

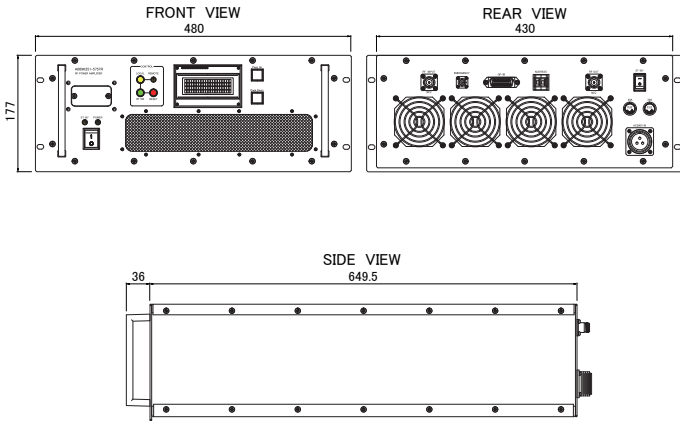

- Class A Linear Solid-State Amplifier
- Broadband Frequency: 9kHz~254MHz
- Output Power : 500W (min.) @3dB Comp.


APPLICATION

- EMC(Electromagnetic Compatibility)
- Etc...

SPECIFICATIONS @ +25°C

Frequency Range	: 9kHz ~ 254MHz
Small Signal Gain	: +57.0dB (min.)
Gain Flatness	: ±2.0dB (max.)
Output Power @3dB Comp.	: 500W (min.)
@1dB Comp.	: 450W (typ.), 400W (min.)
Output I.C.P.	: +65.5dBm (typ.)
Harmonics	: -20.0dBc (max.) @Po=350W
Spurious	: -70.0dBc (max.) @Po=350W
Impedance	: 50Ω
Input VSWR	: 1.5 (max.)
Output VSWR	: 3.0 (max.)
Maximum RF Input Power	: +3.0dBm
AC Supply Input	: AC200V±15%/1φ, 50/60Hz, 4kVA
Operating Temperature	: 0°C to +40°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF-IN N-FEMALE @REAR PANLE RF-OUT N-FEMALE @REAR PANLE
Size	: (W)480mm×(D)649.5mm×(H)177mm
Weight	: 35.5kg (typ.)
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Power Supply Voltage Protection Output Over Power Protection Output Over Reflection Power Protection
Other Functions	: R&K Multi Monitoring System GP-IB Interface Safety Interlock(EMERGENCY)

TYPICAL PERFORMANCE (Temp @+25°C)

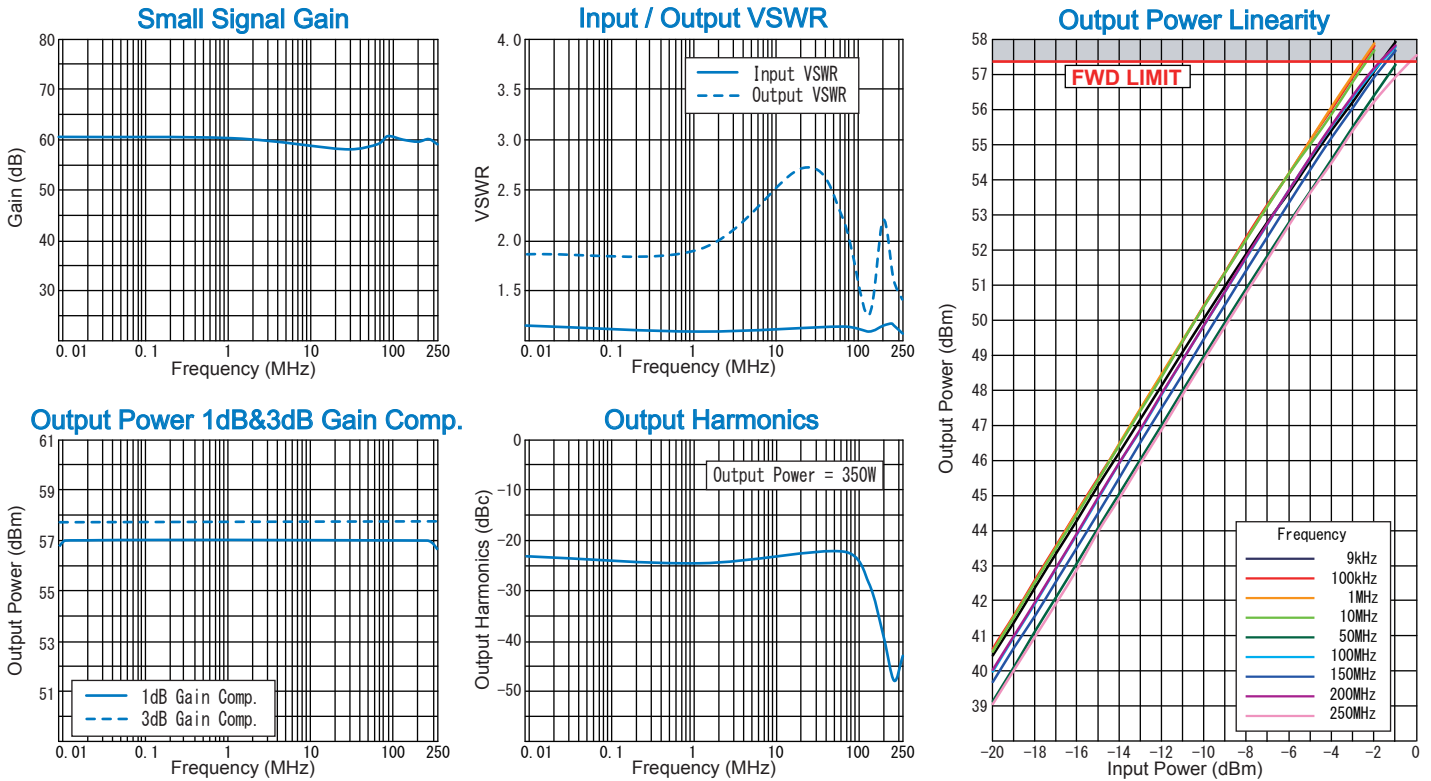

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, The export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rkco.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com