RF POWER AMPLIFIER

R&K-A009K401-4444R

- Class A Linear Solid-State Amplifier
- Broadband Frequency : 9kHz～400MHz
- Output Power : 25W (min.) @1dB Comp.

APPLICATION

- EMC(Electromagnetic Compatibility)
- Etc...

SPECIFICATIONS @+25℃

Frequency Range	: 9kHz ～ 400MHz
Small Signal Gain	: +44.0dB (min.)
Gain Flatness	: ±2.0dB (max.)
Output Power	: 25W (min.) @1dB Comp.
Operation Mode	: Class A
Output I.C.P.	: +54.0dBm (typ.)
Harmonics	: −20.0dBc (max.) @Po=25W
Spurious	: −65.0dBc (max.) @Po=25W
Impedance	: 50Ω
Input VSWR	: 1.5 (max.) Δ1
Output VSWR	: 3.0 (typ.) Δ1
Maximum RF Input Power	: +3.0dBm
AC Supply Input	: AC85V～250V／1φ, 50／60Hz, 300VA
Operating Temperature	: 0℃ to +40℃
Storage Temperature	: −15℃ to +65℃
Connectors	: RF - IN N - FEMALE RF - OUT N - FEMALE
Size	: (W)320mm×(D)350mm×(H)149mm
Weight	: 11.0kg (typ.) Δ1
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Power Supply Voltage Protection

OUTLINE DRAWING

※IN MILLIMETERS

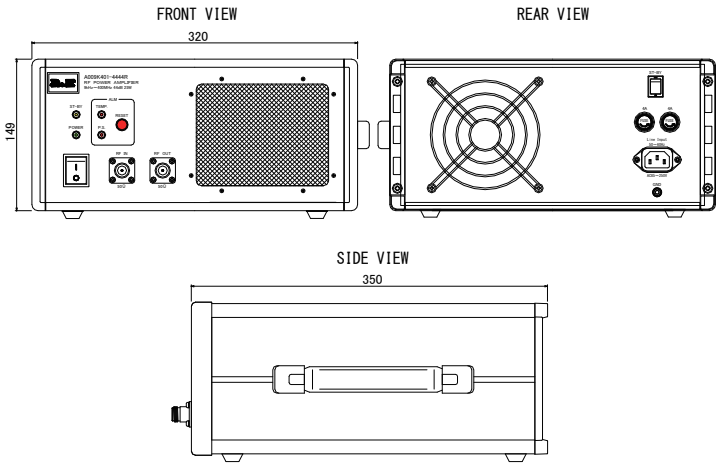

TYPICAL PERFORMANCE (Temp @+25℃)

Gain Flatness

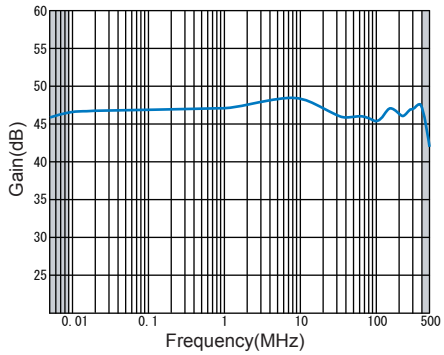

Input / Output VSWR

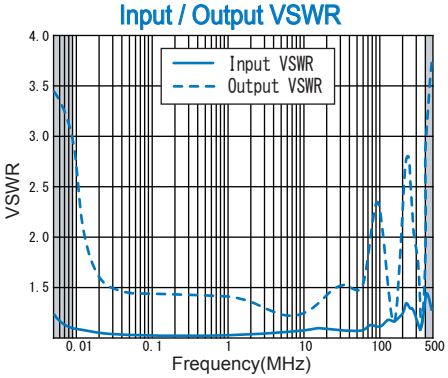

Output Power Linearity

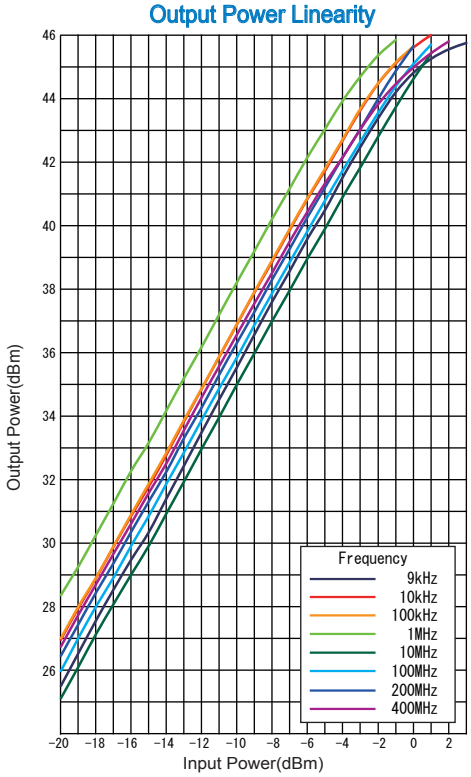

Output Power 1dB Gain Comp.

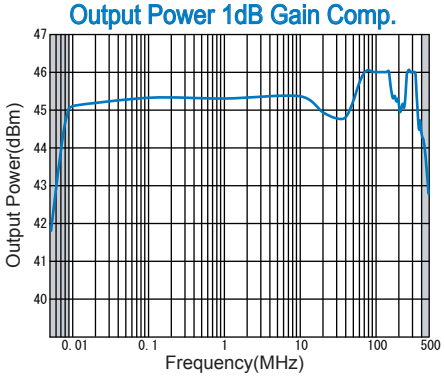

Output Harmonics

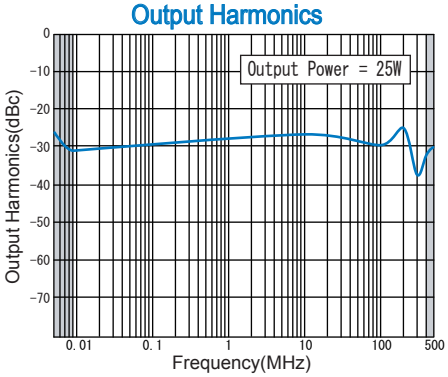

＊CHANGE Δ1 1/Jun./2018

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment Further, The export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited
721-1 Maeda,Fuji-City,Shizuoka-Pref.416-8577 Japan
Tel : +81-545-31-2600 E-mail : info@rkco.jp
Fax : +81-545-31-1600 URL : http://rk-microwave.com