


DOUBLE BALANCED MIXER




R&K-MX120-0S

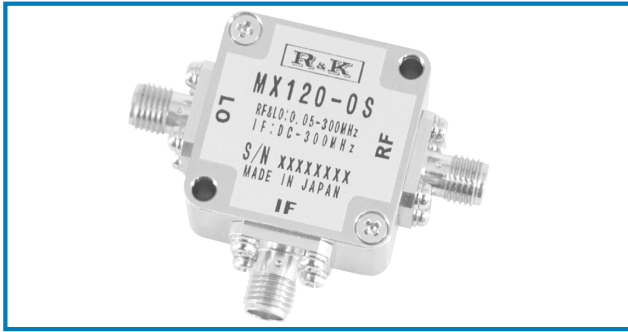

OUTLINE DRAWING

※IN MILLIMETERS

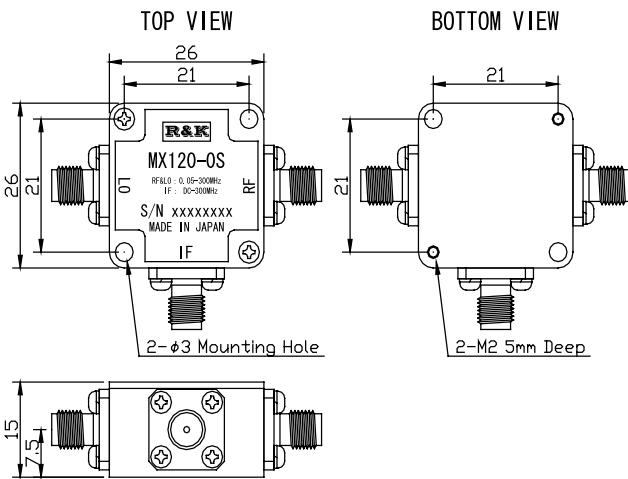

- LO&RF Frequency : 0.05 ~ 300MHz
- IF Frequency : DC ~ 300MHz
- Lo Drive Level : +20dBm
- Low Cost
- RoHS Compliance

SPECIFICATIONS

Frequency Range [LO&RF] : 0.05 - 300MHz
 [IF] : DC - 300MHz
 Conversion Loss Max. (LO Drive Level +20dBm)

	0.05 - 0.5MHz	0.5 - 150MHz	150 - 300MHz
Typ.	6.0dB	5.5dB	7.0dB
Max.	11.0dB	7.5dB	9.5dB

Isolation (min.)



	0.05 - 0.5MHz	0.5 - 150MHz	150 - 300MHz
LO - RF	45dB	25dB	20dB
LO - IF	40dB	20dB	15dB
RF - IF	20dB	10dB	8dB

- Input IP3 @Center Band : +25dBm (typ.)
- Input 1dB Comp. Point : +14dBm (typ.)
- Impedance (All Ports) : 50 Ω
- Maximum RF Input Power : 500mW
- Maximum Peak IF Current : 50mA
- Operating Temperature : -40°C to + 85°C
- Storage Temperature : -40°C to +100°C
- Connectors (Standard) : SMA-Female
- Connectors (Option) : N-Female
: BNC-Female
- Weight (SMA Connector) : 30g (typ.)




HOW TO ORDER

Model Name R&K-MX120-0S S = SMA - FEMALE
 B = BNC - FEMALE
 N = N - FEMALE

TYPICAL PERFORMANCE (Temp @+25°C)

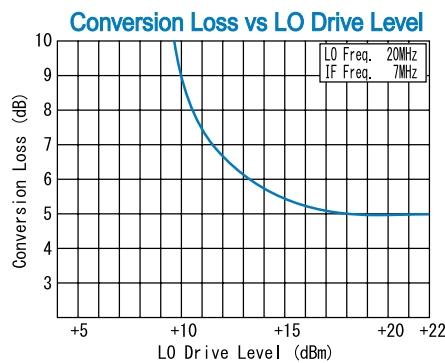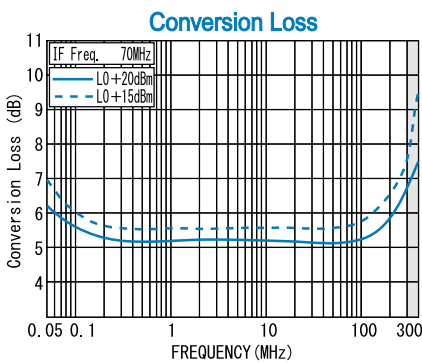

SCHEMATIC

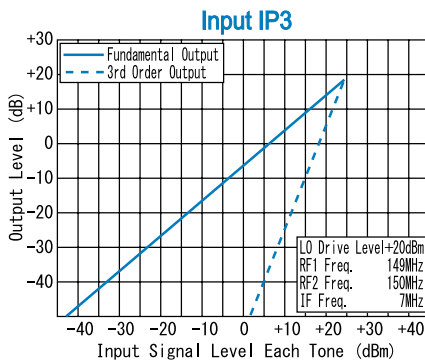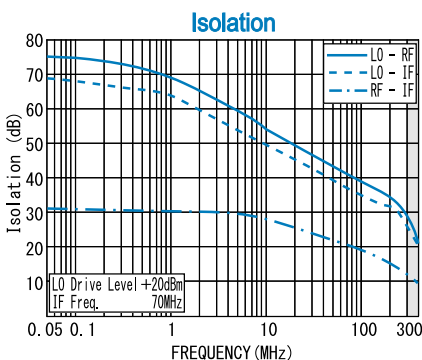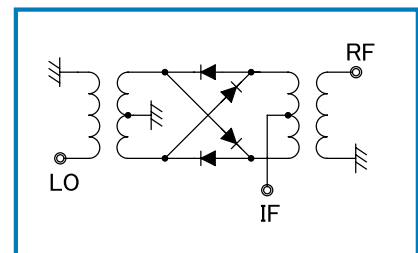

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rk.co.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com