



## R&K-PD640-0S

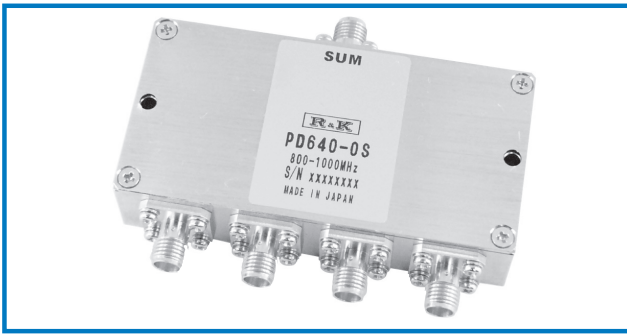

### OUTLINE DRAWING

※IN MILLIMETERS

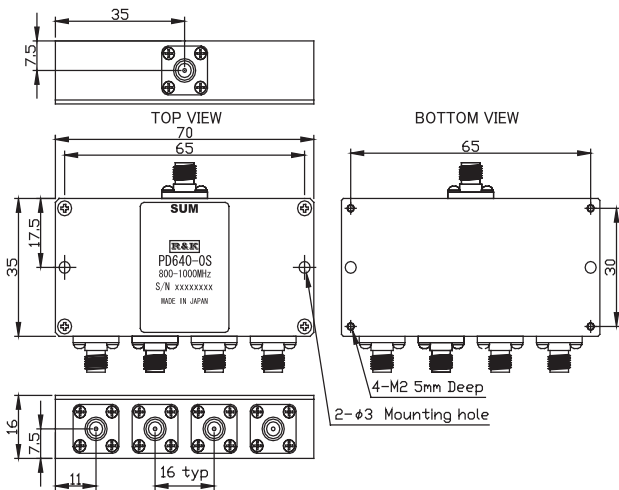

- Frequency Range : 800MHz ~ 1000MHz
- 4way-0°
- Wilkinson Type
- Low Cost
- RoHS Compliance

### SPECIFICATIONS @ +25°C


Frequency Range	: 800MHz ~ 1000MHz
Insertion Loss (Except Theoretical Loss 6.0dB)	: 0.8dB (max.)
Amplitude Balance	: 0.2dB (max.)
Isolation	: 20.0dB (min.)
Phase Balance	: 2° (max.)
Phase Difference	: 0°
Between Output Ports	
VSWR (SUM)	: 1.3:1 (max.)
VSWR (Other)	: 1.3:1 (max.)
Impedance	: 50 Ω
Maximum RF Input Power	: 1W (1.2:1 Load VSWR)
Operating Temperature	: -40°C to +85°C
Storage Temperature	: -40°C to +100°C
Connectors	: SMA-FEMALE
Weight	: BNC-FEMALE : 85g (typ.)

### HOW TO ORDER


Model Name  
R&K-PD640-0S S = SMA - FEMALE  
B = BNC - FEMALE

### TYPICAL PERFORMANCE (Temp @+25°C)


Insertion Loss (6dB theoretical Loss included)

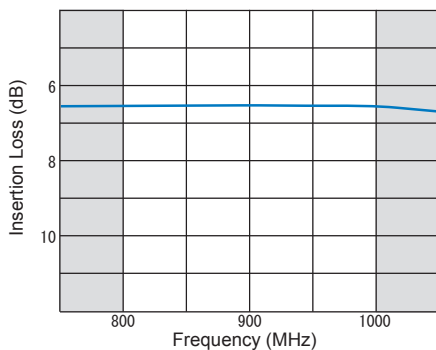


Amplitude Balance

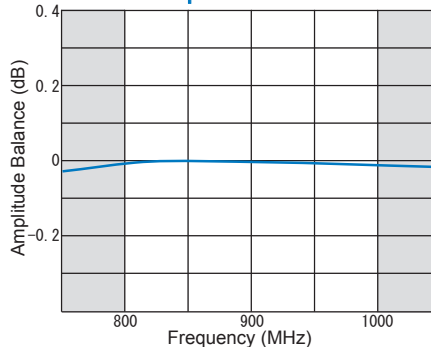


SCHEMATIC

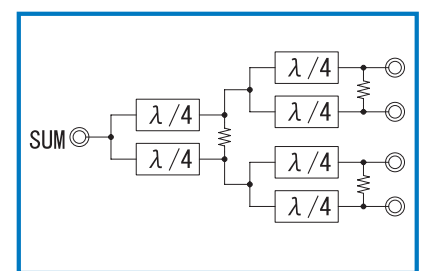


VSWR (All Port)

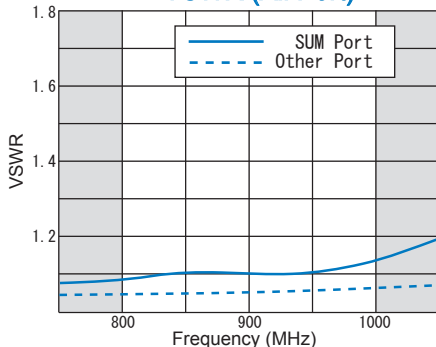

Phase Balance

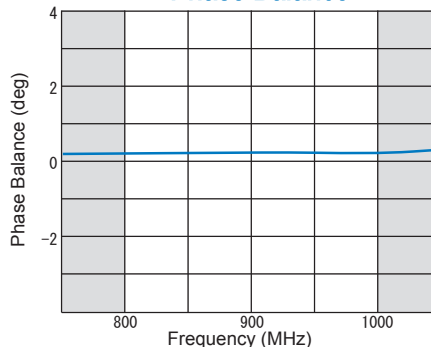

Isolation

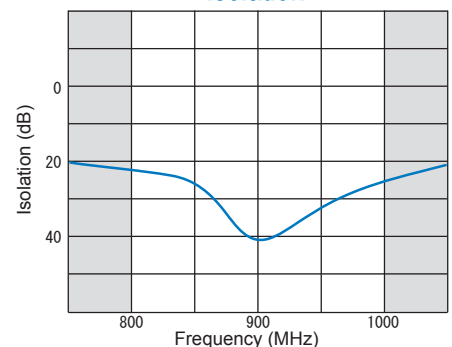

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

## R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan  
Tel : +81-545-31-2600 E-mail : info@rkco.jp  
Fax : +81-545-31-1600 URL : http://rk-microwave.com