

RF POWER AMPLIFIER




R&K-A101K251-5050R



OUTLINE DRAWING

※IN MILLIMETERS

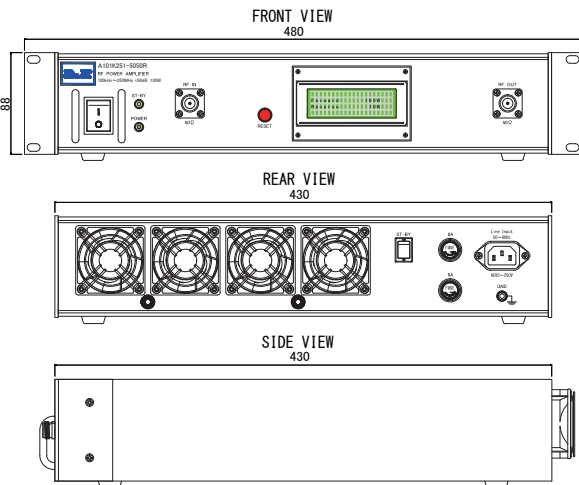

TYPICAL PERFORMANCE (Temp @+25°C)

- Small Size / Light Weight
- All Solid-State Amplifier
- Broadband Frequency: 100kHz ~ 250MHz
- Output Power : 100W @1dB Comp.

APPLICATION

- EMC(Electromagnetic Compatibility)
- Etc...


SPECIFICATIONS @ +25°C

Frequency Range	: 100kHz ~ 250MHz
Small Signal Gain	: +50.0dB (min.)
Gain Flatness	: ± 1.5dB (max.)
Output Power	: 100W (typ.) @1dB Comp. 80W (min.) @1dB Comp.
Operation Mode	: Class A
Harmonics	: -20.0dBc (max.) @Po=100W
Spurious	: -70.0dBc (max.) @Po=100W
Impedance	: 50 Ω
Input VSWR	: 2.0 (max.)
Output VSWR	: 3.0 (max.)
Maximum RF Input Power	: +3.0dBm
AC Supply Input	: AC85V~AC250V / 1φ, 50/60Hz, 600VA
Operating Temperature	: -10°C to +40°C
Storage Temperature	: -15°C to +55°C
Connectors	: RF - IN N - FEMALE RF - OUT N - FEMALE
Size	: (W)480mm × (D)430mm × (H)88mm
Weight	: 17kg (max.)
Cooling	: Forced Air Cooling
Protection	: Over Temperature Protection Power Supply Voltage Protection Output Over Power Protection Output Over Reflection Power Protection


HOW TO ORDER

Model Number
R&K-A101K251-5050R OP **XX** Option:
See Option Line up


Small Signal Gain

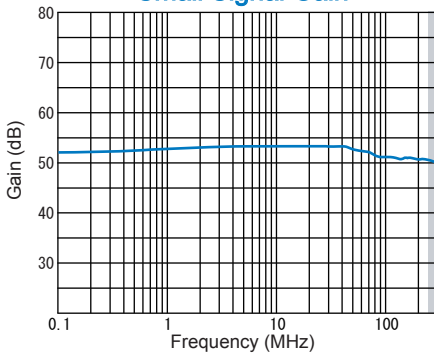


Input / Output VSWR

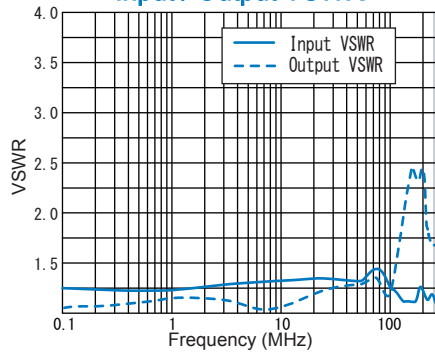


Output Power Linearity

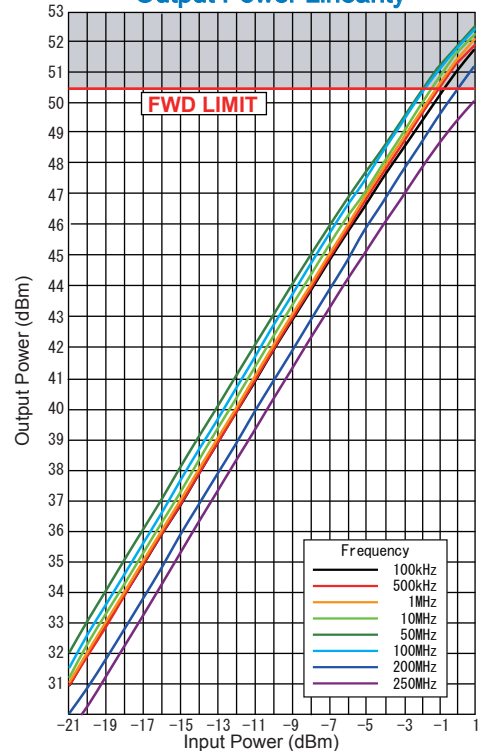

Output Power 1dB Gain Comp.

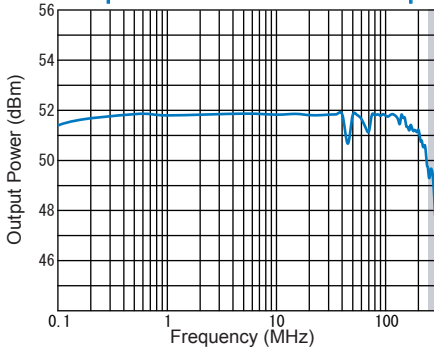

Output Harmonics

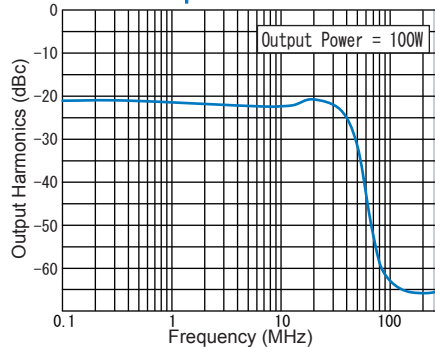

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, The export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
Tel: +81-545-31-2600 E-mail: info@rkco.jp
Fax: +81-545-31-1600 URL: http://rk-microwave.com