


## R&K-GA402M602-3737R








### OUTLINE DRAWING

※IN MILLIMETERS

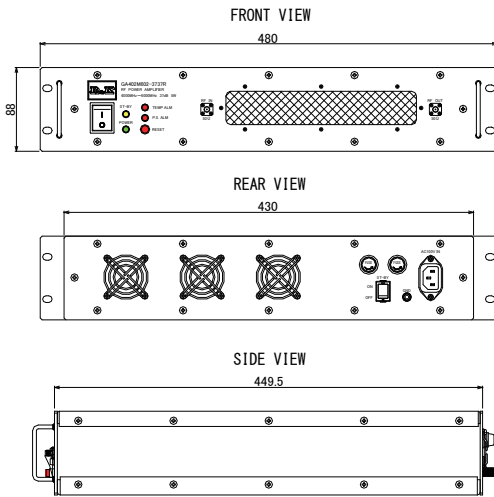

### TYPICAL PERFORMANCE (Temp @+25°C)

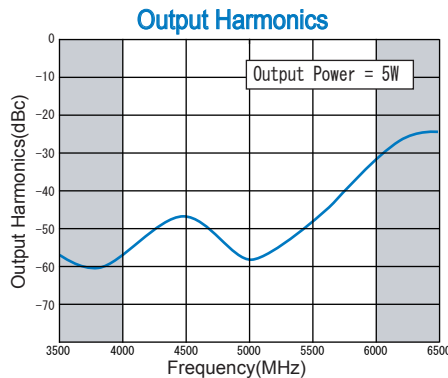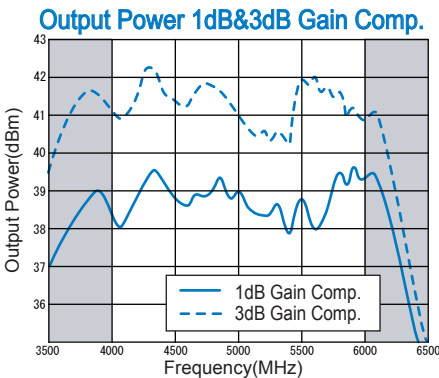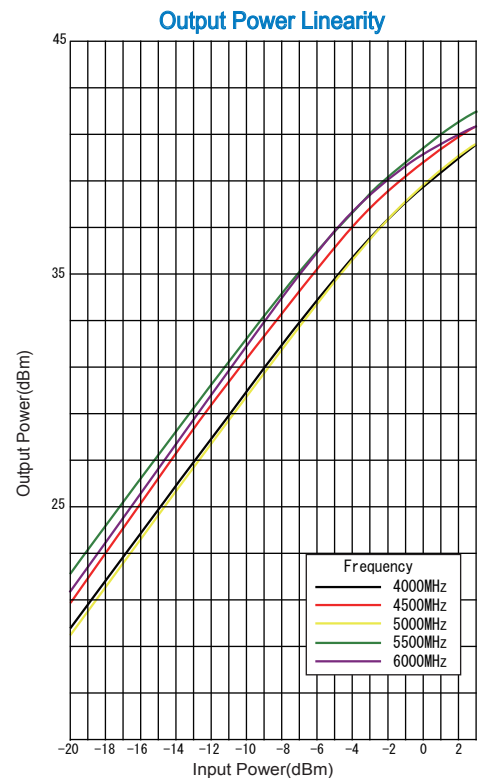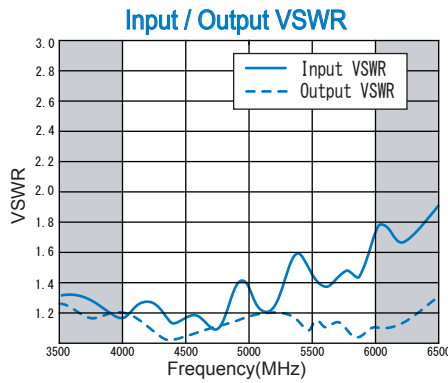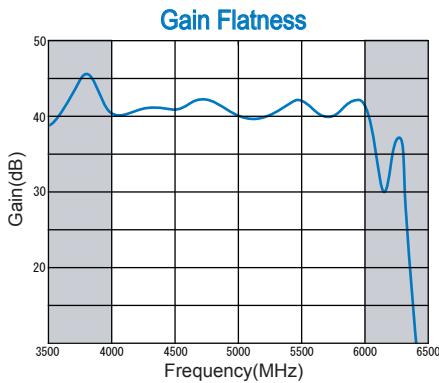

- Class A Linear Solid-State Amplifier
- Broadband Frequency: 4000MHz ~ 6000MHz
- Output Power : 5W (min.) @1dB Comp.
- With Output Circulator

### SPECIFICATIONS @ +25°C

Frequency Range	: 4000MHz ~ 6000MHz
Small Signal Gain	: +37.0dB (min.)
Gain Flatness	: ±2.0dB (max.)
Output Power	: 5W (min.) @1dB Comp.
Operation Mode	: Class A
Output I.C.P.	: +47.0dBm (typ.)
Harmonics	: -18.0dBc (max.) @Po=5W
Spurious	: -70.0dBc (max.) @Po=5W
Impedance	: 50 Ω
Input VSWR	: 2.0 (max.)
Output VSWR	: 1.8 (max.)
Maximum RF Input Power	: +5.0dBm
AC Supply Input	: AC100V ± 10% / 1 φ , 50 / 60Hz, 200VA
Operating Temperature	: 0°C to +40°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF - IN SMA - FEMALE RF - OUT SMA - FEMALE
Size	: (W)480mm×(D)449.5mm×(H)88mm
Weight	: 10.0kg (max.)
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Voltage Abnormality Protection
Other	: With Output Circulator

### HOW TO ORDER

Model Name  
R&K-GA402M602-3737R No Option

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, R&K cannot export products to any country for use in military or defense applications.

## R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan  
Tel : +81-545-31-2600 E-mail : info@rkco.jp  
Fax : +81-545-31-1600 URL : http://rk-microwave.com