

R&K-GA801M402-5959R




- Class A Linear Solid-State Amplifier
- Broadband Frequency: 800MHz~4000MHz
- Output Power (CW) : 800W (min.) @3dB Comp.

APPLICATION

- EMC(Electromagnetic Compatibility)
- Accelerator Application
- Telecommunication Test and Measurement Application
- Etc...

OUTLINE DRAWING

※IN MILLIMETERS

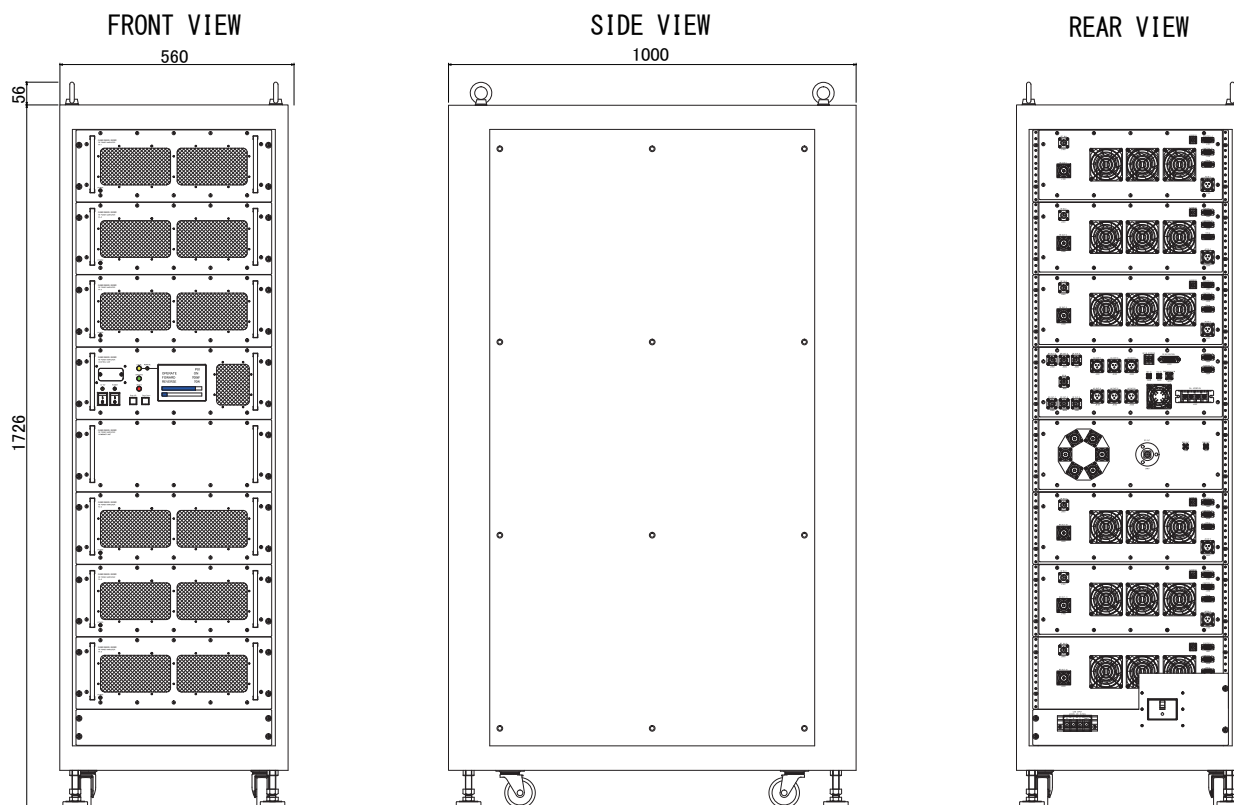

SPECIFICATIONS @ +25°C

Frequency Range	: 800MHz ~ 4000MHz
Small Signal Gain	: +59.0dB (min.)
Gain Flatness	: ±2.5dB (max.)
Output Power (CW)	: 800W (min.) @3dB Comp.
	: 600W (min.) @1dB Comp.
Operation Mode	: Class A
Harmonics	: -18.0dBc (max.) @Po=700W
Spurious	: -60.0dBc (max.) @Po=700W
Impedance	: 50 Ω
Input VSWR	: 2.0 (max.)
Output VSWR	: 3.0 (max.)
Maximum RF Input Power	: +3.0dBm
AC Supply Input	: AC200V±15%/3φ , 50/60Hz, 10.5kVA
Operating Temperature	: 0°C to +35°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF-IN N-FEMALE @REAR PANEL RF-OUT 7/8" Flange @REAR PANEL
Size	: (W)560mm×(D)1000mm×(H)1726mm (Excluding Projection)
Weight	: 450.0kg (max.)
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Power Supply Voltage Protection Output Over Power Protection Output Over Reflection Power Protection
Other Functions	: R&K Multi Monitoring System GP-IB(IEEE-488) Safety Interlock(EMERGENCY)

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, The export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".


R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref.416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rkco.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com


TYPICAL PERFORMANCE (Temp @+25°C)

R&K-GA801M402-5959R


Small Signal Gain

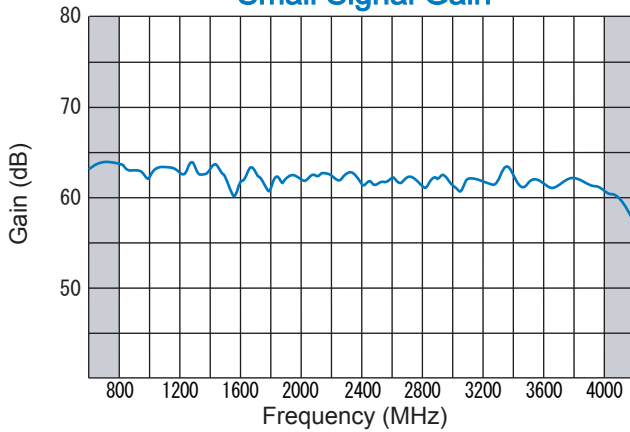


Input / Output VSWR

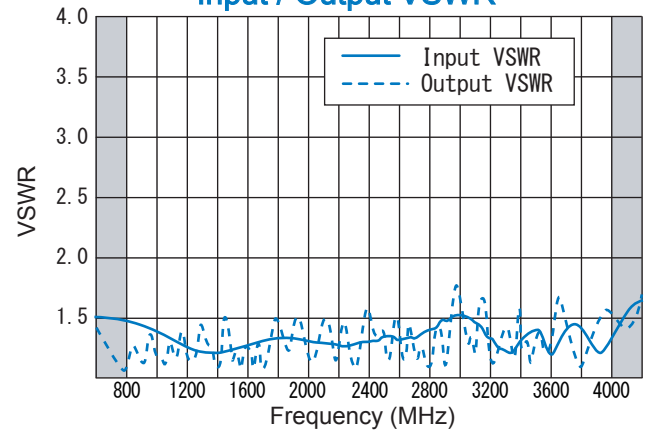


Output Power 1dB Gain Comp.

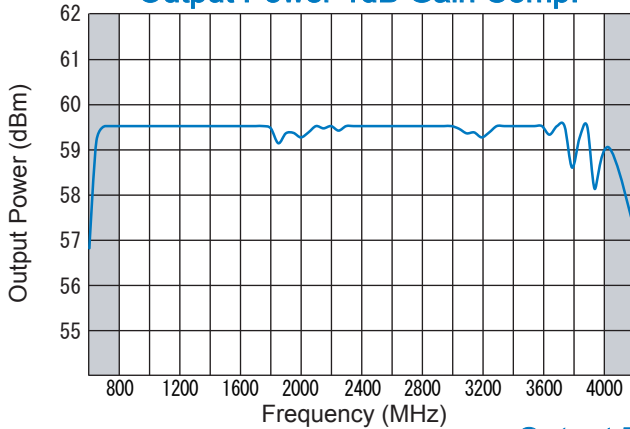

Output Harmonics

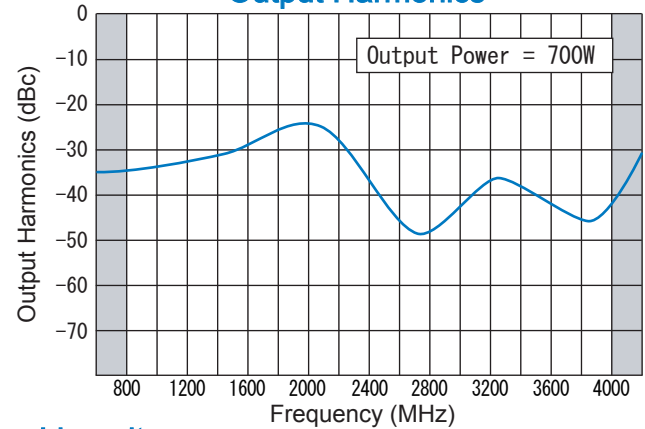

Output Power Linearity

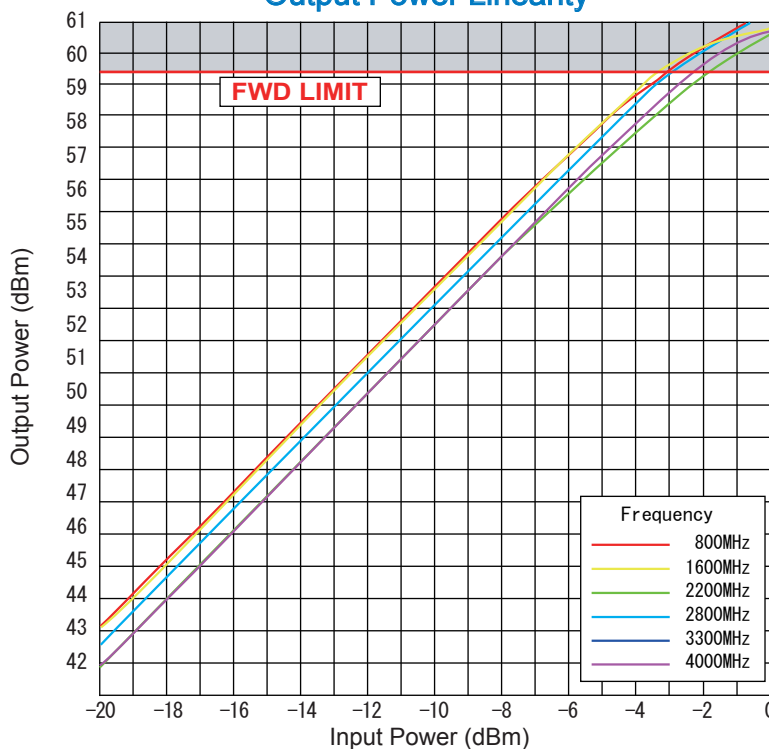

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, The export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
 Tel : +81-545-31-2600 E-mail : info@rkco.jp
 Fax : +81-545-31-1600 URL : http://rk-microwave.com