

RF POWER AMPLIFIER



2020 Model

R&K-GA252M602-5353R



- Ultra Wide Band Power Amplifier
- Broadband Frequency: 2500MHz~6000MHz
- Output Power (CW) : 200W (min.) @1dB Comp.
- Building-block Construction Design

APPLICATION


- EMC (Electromagnetic Compatibility)
- Accelerator Application
- Telecommunication Test and Measurement Application
- Etc...

SPECIFICATIONS @ +25°C

Frequency Range	: 2500MHz ~ 6000MHz
Small Signal Gain	: +53.0dB (min.)
Gain Flatness	: ±2.5dB (max.)
Output Power (CW)	: 200W (min.) @1dB Comp.
Operation Mode	: Class A
Harmonics	: -20.0dBc (max.) @Po=200W
Spurious	: -70.0dBc (max.) @Po=200W
Impedance	: 50Ω
Input Return Loss	: 9.5dB (min.) / VSWR : 2.0 (max.)
Output Return Loss	: 6.0dB (min.) / VSWR : 3.0 (max.)
Maximum RF Input Power	: +3dBm
AC Supply Input	: AC200V ± 15% / 1φ, 50/60Hz, 4.2kVA
Operating Temperature	: 0°C to +35°C
Storage Temperature	: -15°C to +65°C
Connectors	: RF - IN N - FEMALE @ REAR PANEL RF - OUT 7/16-FEMALE @ REAR PANEL
Size (Standard)	: (W)560mm × (D)1000mm × (H)838mm (EIA:14U) *Excluding Projection
Weight	: 195.0kg (max.)
Cooling	: Forced Air Cooling
Protection Circuits	: Over Temperature Protection Power Supply Voltage Protection Output Over Power Protection (@220W) Output Over Reflected Power Protection (@120W)
Remote Interface	: [Standard] GPIB (IEEE-488) [Optional] Ethernet, RS-232C
Other Function	: Safety Interlock (EMERGENCY)


OUTLINE DRAWING

※ IN MILLIMETERS

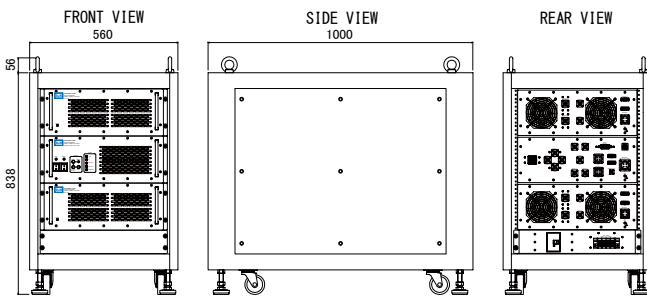


TYPICAL PERFORMANCE (Temp @ +25°C)


Small Signal Gain

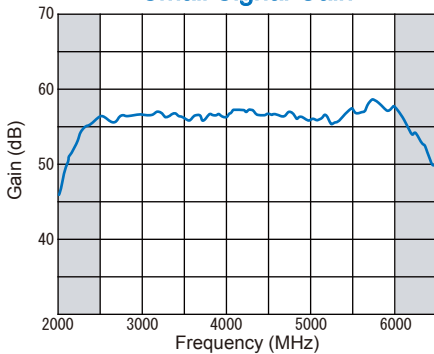


Input / Output VSWR

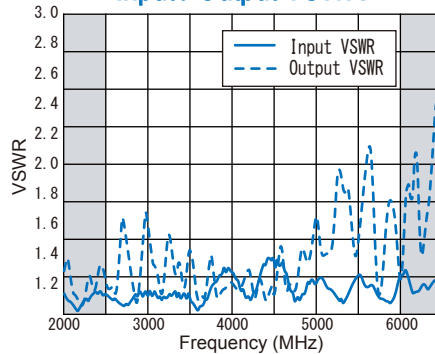


Output Power Linearity

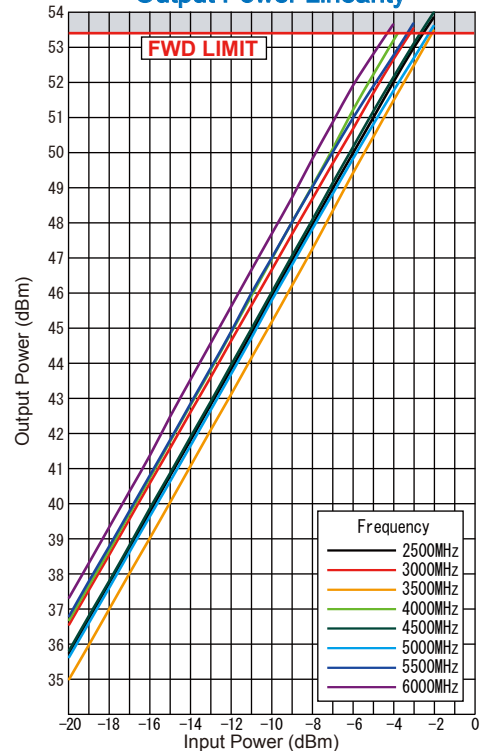

Output Power 1dB Gain Comp.

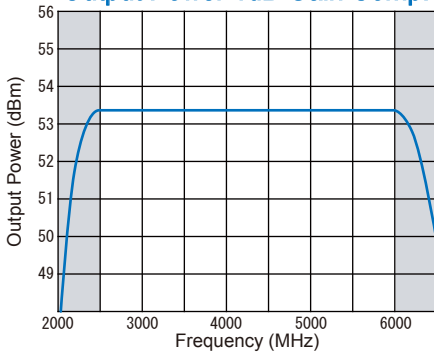

Output Harmonics

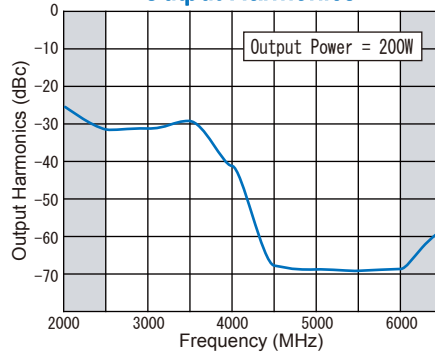

R&K reserves the right to make changes in the specifications of or discontinue products at any time without notice. R&K products shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as aerospace uses or medical life support equipment. Further, the export of R&K products from Japan may be subject to an export license by the government of Japan, based on Japan's "Foreign Exchange and Foreign Trade Law".

R&K Company Limited

721-1 Maeda, Fuji-City, Shizuoka-Pref. 416-8577 Japan
Tel : +81-545-31-2600 E-mail : info@rkco.jp
Fax : +81-545-31-1600 URL : http://rk-microwave.com